RiLine60 busbar systems up to 800 A (60 mm)

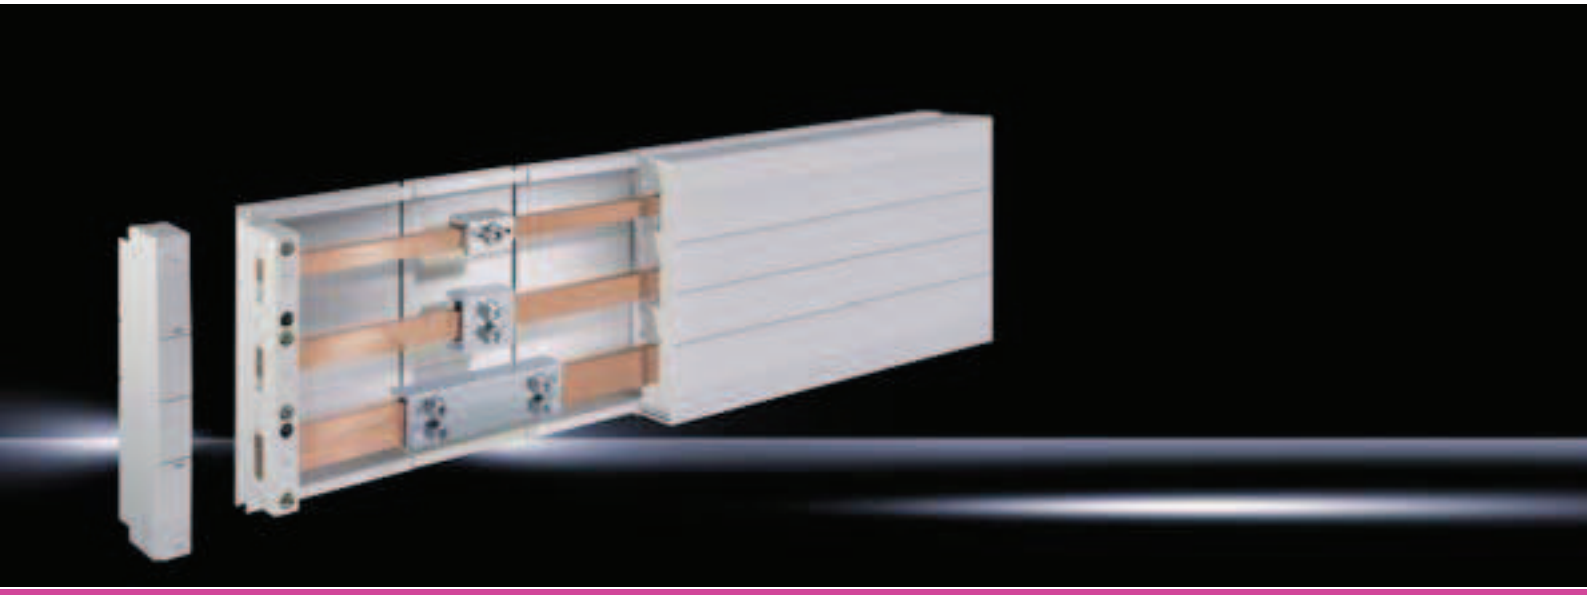

Connection systems Page 280 – 282 **Component adaptors** Page 283 – 289 **Fuse elements** Page 294 – 309

Material:
– Polyamide (PA 6.6).
– Fire protection corresponding to UL 94-V0

Colour:
RAL 7035

Note:
The use of a base tray is required for UL applications.

Short-circuit resistance diagrams:
Available on the Internet.

Technical information:
Available on the Internet.

Detailed drawings:
Available on the Internet.

Flat copper bar system

Busbar support								
							 30 x 10 PLUS	
No. of poles/bar centre distance		Packs of	3-pole/60 mm			4-pole/60 mm		Page
External attachment			■	–	–	–	–	
Internal attachment			–	■	■	■	■	
For busbars mm	12 x 5/10		■	■	–	■	–	
	15 x 5 – 25 x 10, 30 x 5		■	■	■	■	–	
	30 x 10		■	■	■	■	■	
Approvals			–	–	Ⓤ	Ⓤ	Ⓤ	
Model No. SV		4	**9340.010**	**9340.000**	**9340.050**	**9340.004**	**9342.014**	
Also required								
Spacer when using busbars 12 x 5/10 mm			■	■	–	■	–	
Model No. SV		12	9340.090	9340.090	–	9340.090	–	310